



MERCATOR
NAVIGATING SUCCESS

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

MHP3414IC

Half Size Proofer, Insulated Clear Door

MODEL: ☐ MHP3414IC

SPECIAL FEATURES


- Undercounter units are available with clear Lexan or solid aluminum doors
- All models feature field-reversible doors with left-hand hinge capability
- Dual functionality for heating and proofing:
 - Heating mode maintains temperatures up to 180°F (80°C)
 - Proof mode controls humidity from 30% to 95% and temperatures up to 115°F (46°C)
- Undercounter models include four (4) 3" casters (two with brakes)
- Corner bumpers help protect against impact
- Easy-to-read LED thermometer for quick monitoring
- Removable control drawer for simple cleaning and servicing
- Undercounter models hold up to 14 full-size sheet pans with 1 1/2" spacing
- Equipped with a 6.3 ft. NEMA 5-15P cord and protective cable cover for added safety




TECHNICAL DATA

MODEL	DIMENSIONS	INSULATION	DOOR	AMP DRAW (Nominal / Max)	WATTAGE	VOLTAGE	NET WEIGHT (LBS)
MHP3414IC	22 4/5" x 33 2/5" x 32 7/10" (579 x 848 x 831 mm)	Yes	Clear	12	1500W	120V / 60 Hz / 1PH	79 lbs (36 kg)

FRONT VIEW

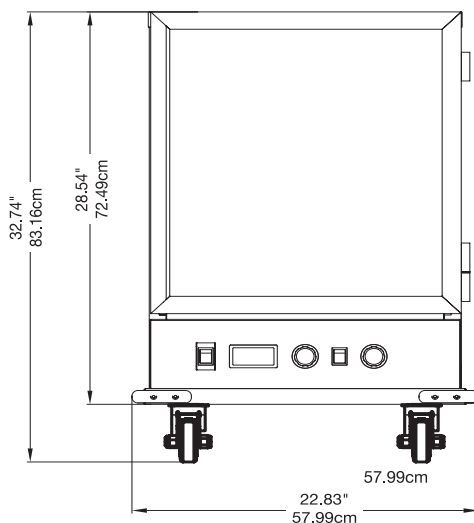

SIDE VIEW

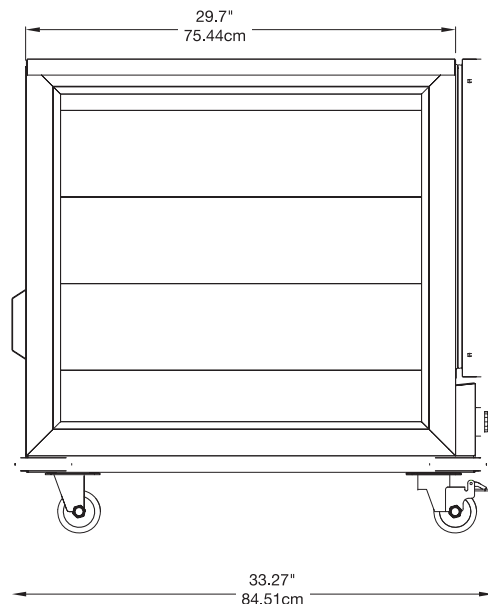

NEMA 5-15P



Intertek



Intertek

Available in export voltages and plug types.

WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.

© 2026 MERCATOR