



MERCATOR
NAVIGATING SUCCESS

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

MHP6836C

Full Size Proofing Cabinet, Non-Insulated Clear Door

MODEL: ☐ MHP6836C

SPECIAL FEATURES


- Full-size units offer door options in clear Lexan, solid aluminum, or double solid aluminum doors
- All models feature field-reversible doors with left-hand hinge capability
- Heating mode maintains temperatures up to 180°F (80°C)
- Proof mode controls humidity from 30% to 95% and temperatures up to 115°F (46°C)
- Full-size models include four (4) 5" casters (two with brakes)
- Corner bumpers help protect against impact
- Easy-to-read LED thermometer for quick monitoring
- Removable control drawer for simple cleaning and servicing
- Full-size models hold up to 36 full-size sheet pans with 1 1/2" spacing
- Equipped with a 5.83 ft. NEMA 5-15P cord and protective cable cover for added safety




TECHNICAL DATA

**MHP6836C is not approved for sale in Connecticut*

MODEL	DIMENSIONS	INSULATION	DOOR	AMP DRAW (Nominal / Max)	WATTAGE	VOLTAGE	NET WEIGHT (LBS)
MHP6836C	22 4/5" x 33" x 67 3/5" (579 x 838 x 1717 mm)	No	Clear	12	1500W	120V / 60 Hz / 1PH	110 lbs (50 kg)

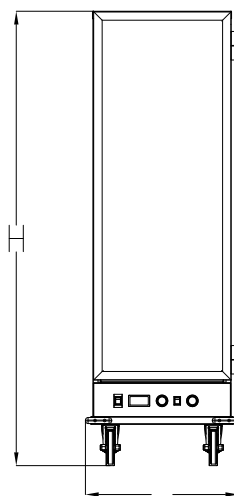

FRONT

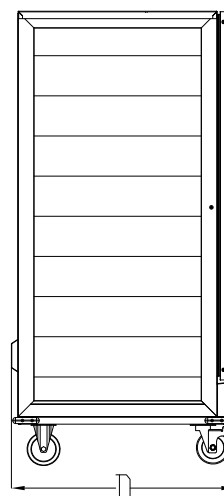

SIDE



NEMA 5-15P



Intertek



Intertek

Available in export voltages and plug types.

WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.

© 2026 MERCATOR